


NAiS

MICROWAVE RELAY
FOR ATTENUATOR
CIRCUIT

RA-RELAYS



FEATURES

1. High frequency characteristics
(Impedance 50Ω, ~1.0GHz)

- Insertion loss; Max. 0.3dB
 - Isolation; Min. 20dB (Between open contacts)
Min. 30dB (Between contact sets)
 - V.S.W.R.; Max. 1.2
2. Surface mount terminal
- This relay is a surface-mounted model with excellent high-frequency properties. In addition, it can use a microstrip

line in the base circuit design which spares the labor of machining the base.

3. Low profile small type
9.7(W)×14.7(L)×5.9(H) mm
.382(W)×.579(L)×.232(H) inch

4. High sensitivity: 140 mW nominal operating power

5. High contact reliability
Electrical life: Min. 10⁷ (10mA 10V DC)

SPECIFICATIONS

Contact			2 Form C
Arrangement			Gold-clad silver alloy
Contact material			Max. 75mΩ
Initial contact resistance			
Rating	Contact rating (resistive)		10mA 10 V DC 1A 30 V DC
	Contact carrying power		Max. 3W(at 1.0GHz, imped- ance 50Ω, V.S.W.R. max.1.2)
	Max. switching voltage		30 V DC
	Max. switching current		1A
High fre- quency character- istics (~1GHz, Imped- ance 50Ω)	Isolation	Between open con- tacts	Min. 20dB
		Between contact sets	Min. 30dB
	Insertion loss		Max. 0.3dB
	V.S.W.R.		Max. 1.2
	Input power		Max. 3W(at 1.0GHz, imped- ance 50Ω, V.S.W.R. max.1.2)
Nominal operating power	Single side stable		140mW (1.5 to 12V) 200mW (24V) 300mW (48V)
	1 coil latching		70 mW (1.5 to 12V) 100mW (24V)
	2 coil latching		140mW (1.5 to 12V) 200mW (24V)
Expected life (min. operation)	Mechanical (at 180 cpm)		10 ⁸
	Electrical (at 20 cpm)	10mA 10 V DC(resis- tive load)	10 ⁷
		1A 30 V DC (resistive load)	10 ⁵

Characteristics		
Initial insulation resistance *1		Min. 100 MΩ(at 500 V DC)
Initial breakdown voltage *2	Between open con- tacts	750 Vrms for 1 min.
	Between contact sets	1,000 Vrms for 1 min.
	Between contact and coil	1,000 Vrms for 1 min.
	Between contact and earth terminal	1,000 Vrms for 1 min.
Operate time [Set time] *3 (at 20°C)		Max. 4ms (Approx. 2ms) [Max. 4ms (Approx. 2ms)]
Release time (without diode) [Reset time] *3(at 20°C)		Max. 4ms (Approx. 1ms) [Max. 4ms (Approx. 2ms)]
Temperature rise (at 20°C) *4		Max. 60°C
Shock resistance	Functional *5	500 m/s ²
	Destructive *6	1,000 m/s ²
Vibration resistance	Functional *7	10 to 55 Hz at double amplitude of 3mm
	Destructive	10 to 55 Hz at double amplitude of 5mm
Conditions for oper- ation, transport and storage *8 (Not freezing and condensing at low temperature)	Ambient temp	-40°C to +85°C -40°F to +185°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 2g .07oz

Remarks

* Specifications will vary with foreign standards certification ratings.

*1 Measurement at same location as "Initial breakdown voltage" section.

*2 Detection current: 10mA

*3 Nominal operating voltage applied to the coil, excluding contact bounce time.

*4 By resistive method, nominal voltage applied to the coil: 3W contact carrying power: at 1.0GHz, Impedance 50Ω, V.S.W.R. Max.1.2

*5 Half-wave pulse of sine wave: 11ms, detection time: 10μs.

*6 Half-wave pulse of sine wave: 6ms

*7 Detection time: 10μs

*8 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61)

TYPICAL APPLICATIONS

- Measurement instruments
Oscilloscope attenuator circuit

ORDERING INFORMATION

Ex.	A	RA	2	0	0	A	03
Product name	Contact arrangement		Operating function		Type of operation	Terminal shape	Coil voltage, V DC
RA	2: 2 Form C		0: Single side stable 1: 1 coil latching 2: 2 coil latching		0: Standard type (B.B.M)	A: Surface-mount terminal	1H: 1.5 09: 9 03: 3 12: 12 4H: 4.5 24: 24 05: 5 48: 48 06: 6

Note: Standard packing; Carton: 40 pcs. Case 1,000 pcs.


- **Single side stable type**

- 1 coil latching type

- **2 coil latching type**

DIMENSIONS

mm inch



RA


REFERENCE DATA

1. High frequency characteristics


Sample: ARA200A12

Measuring method: Measured with HP network analyzer (HP8753C).


• Insertion loss

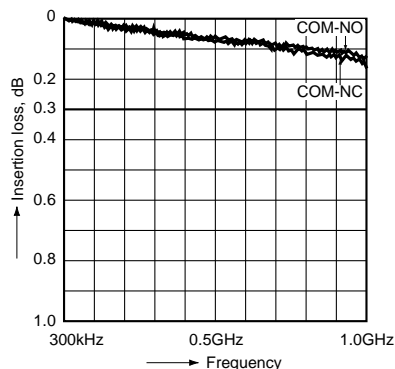

• Isolation

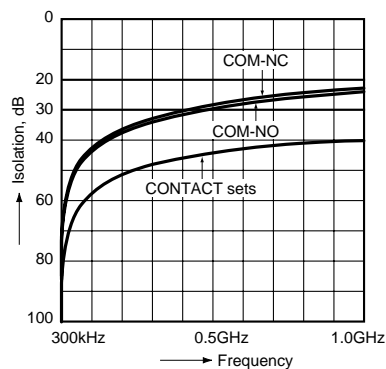

• V.S.W.R.

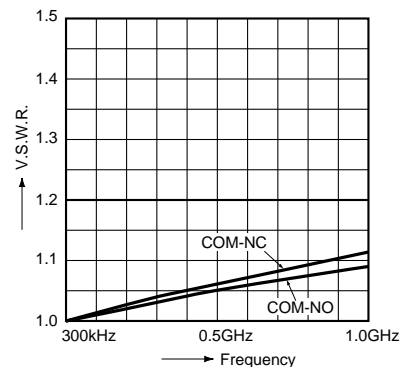

NOTES

1. Coil operating power

Pure DC current should be applied to the coil. The wave form should be rectangular. If it includes ripple, the ripple factor should be less than 5%.

However, check it with the actual circuit since the characteristics may be slightly different. The nominal operating voltage should be applied to the coil for more than 10 ms to set/reset the latching type relay.

2. Coil connection

When connecting coils, refer to the wiring diagram to prevent mis-operation or malfunction.

3. External magnetic field

Since RA relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.

4. Cleaning

For automatic cleaning, the boiling method is recommended. Avoid ultrasonic cleaning which subjects the relays to high frequency vibrations, which may cause the contacts to stick.

It is recommended that alcoholic solvents be used.

5. Soldering

Manual soldering shall be performed under following condition.


Tip temperature: 280°C to 300°C .536°F to 572°F

Wattage: 30 to 60W


Soldering time: within 5s

In case of automatic soldering, the following conditions should be observed

1) Position of measuring temperature

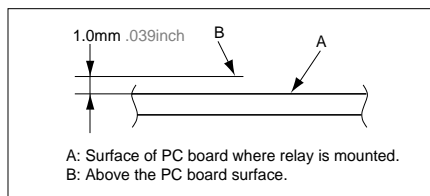

2) IR (infrared reflow) soldering method

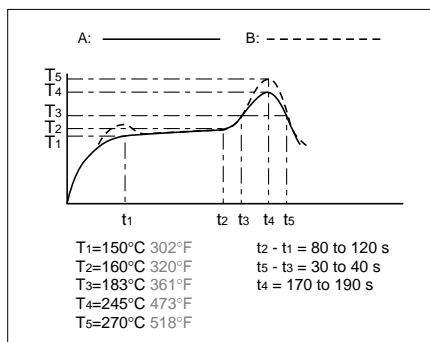

Temperature rise of relay itself may vary according to the mounting level or the heating method of reflow equipment. Therefore, please set the temperature of soldering portion of relay terminal and the top surface of the relay case not to exceed the above mentioned soldering condition.

It is recommended to check the temperature rise of each portion under actual mounting condition before use.

The soldering earth shall be performed by manual soldering.

For Cautions for Use, see Relay Technical Information (Page 48 to 76).